

# Smart Tek™

**Smart Electric**  
 3615 N.W. 115th Ave.  
 Miami, Florida 33178  
 Toll Free: 1-866-591-9898  
 Fax: 305-500-9896

## Specifications

### SE3463

#### 1/2 HP Direct Drive Motors

HP	CAPACITOR	SPEEDS TO USE	SE3463 FLA	SE3464 FLA
1/2	10/370	All Speeds	6.2	3.6
1/3	5/370 or 7.5/370*	All Speeds	6.1	3.5
1/4	5/370 or 7.5/370*	Med-Hi Med-Lo:Lo	4.4	2.8
1/5	5/370 or 7.5/370*	Med-Lo:Lo	3.2	1.9
1/6	5/370 or 7.5/370*	Lo	2.4	1.3

\* If you use a 7.5 MFD/370V capacitor will result in approximately 10% stronger motor

### SE3466 and SE3467

#### 3/4 HP Direct Drive Motors

HP	CAPACITOR	SPEEDS TO USE	SE3466 FLA	SE3467 FLA
3/4	20/370	All Speeds	8.1	3.5
1/2	10/370	All Speeds	6.6	2.7
1/3	10/370	Med-Hi Med-Lo:Lo	4.6	1.4
1/4	10/370	Med-Lo:Lo	3.8	1.1
1/5	10/370	Lo	3.1	1.0

If you use a 7.5 MFD/370V capacitor will result in approximately 10% stronger motor

### SE3465

#### 1075 RPM

HP	SPEEDS TO USE	208V CAPACITOR	230V CAPACITOR	FLA
1/3	Hi	7.5/370	5/370	2.6
1/4	Hi	7.5/370	5/370	2.5
1/5	Lo	7.5/370	5/370	2.0
1/6	Lo	7.5/370	5/370	1.8

### SE3468

#### 1075 RPM


HP	SPEEDS TO USE	208V CAPACITOR	230V CAPACITOR	FLA
1/2	Hi	12.5/370	10/370	3.0
1/3	Hi	12.5/370	10/370	2.2
1/4	Lo	12.5/370	10/370	1.6
1/5	Lo	12.5/370	10/370	1.3

### SE3469

#### 825 RPM

HP	SPEEDS TO USE	208V CAPACITOR	230V CAPACITOR	FLA
1/3	Hi	10/370	7.5/370	1.9
1/4	Hi	10/370	7.5/370	1.5
1/5	Lo	10/370	7.5/370	1.2
1/6	Lo	10/370	7.5/370	1.0

## Direct Drives

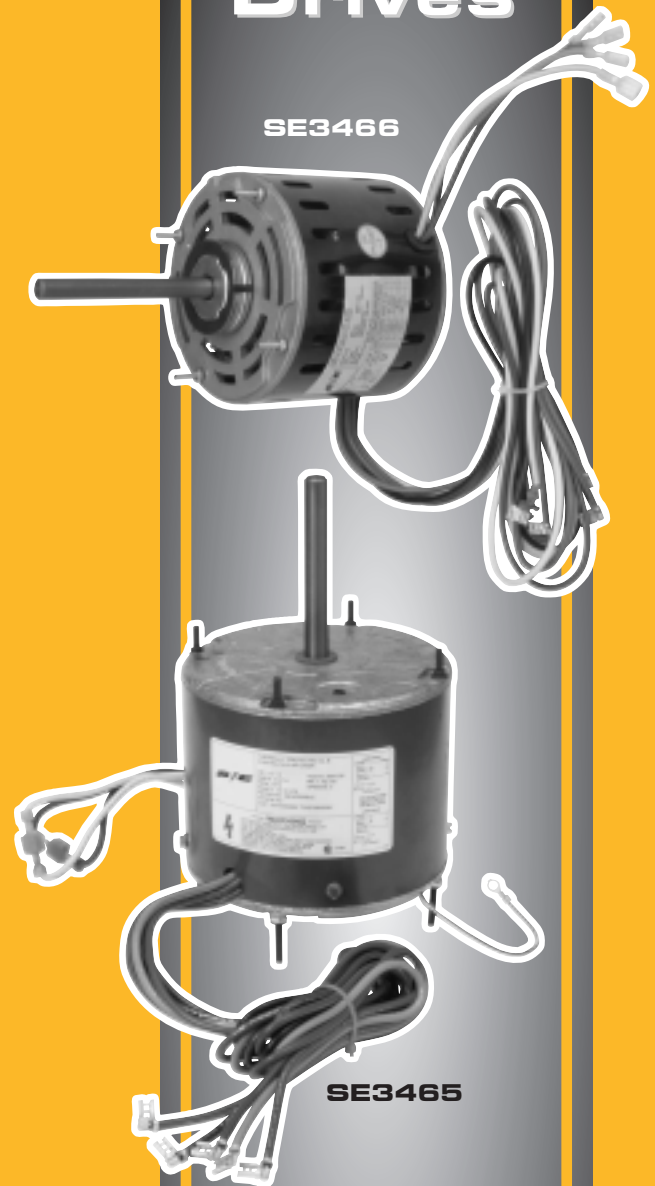

**Smart Tek™**



# Smart Tek™

## Multi-Horse Power Motors

Think Quality – Think Savings

# Think Smart!

### Cross Reference

#### SE3465

##### Condenser Fan Motor 208/230V - 1075 RPM

HP	Emerson	GE	Fasco	A.O. Smith
1/6	1859	3727	D917	FSE1016S
1/4	1860	3728	D909	FSE1026S
1/3	1861	3729	D908	FSE136S

#### SE3466

##### Direct Drive 115V - 1075 RPM

HP	Emerson	GE	Fasco	A.O. Smith
1/4	1863	3583/3383	D721	DL1026
1/3	1864	3585/3385	D727	DL136
1/2	1865	3587/3387	D701	DL1056
3/4	8904	3589/3389	D728	DL1076

#### SE3468

##### Condenser Fan Motor 208/230V - 1075 RPM

HP	Emerson	GE	Fasco	A.O. Smith
1/4	1860	3728	D909	-
1/3	1861	3729	D908	-
1/2	1862	3730	D907	-

#### SE3467

##### Direct Drive 208/230V - 1075 RPM

HP	Emerson	GE	Fasco	A.O. Smith
1/4	1971	3584/3384	D725	DL1026
1/3	1972	3586/3386	D723	DL136
1/2	1973	3588/3388	D703	DL1056
3/4	8905	3590/3390	D729	DL1076

#### SE3469

##### Condenser Fan Motor 208/230V - 825 RPM

HP	Emerson	GE	Fasco	A.O. Smith
1/6	1873	3203	D798	FSE1018S
1/4	1874	3204	D934	FSE1028S
1/3	1875	3205	D936	FSE138S

#### SE3463

##### Direct Drive 208/230V - 1075 RPM

HP	Emerson	GE	Fasco	A.O. Smith	RHEEM/RUUD
1/4	1863	3583/3383	D721	DL1026	51-23012-41
1/3	1864	3585/3385	D727	DL1036	-
1/2	1865	3587/3387	D701	DL1056	-



3615 N.W. 115th Ave. Miami, Florida 33178  
 Toll Free: 1-866-591-9898 | Fax: 305-500-9896

Distributed by: